



## Hitouch 5

HN18-72H

540-560W

### MONO PERC

High Efficiency Module

21.68%

Maximum Efficiency

25 YEARS

Product Warranty



#### Higher Power Output

Higher module conversion efficiency benefit from bigger wafer and half-cell structure.

MBB technology enhances current collection with lower series resistance.



#### Excellent Temperature Coefficient

Lower operating temperature and temperature coefficient increases the power output.



#### Long-Term Reliability

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal).




#### Lower Hot Spot and Crack Risk

Reduce hot-spot risk with optimized electrical design and lower operating current.

Reduce crack risk by MBB solar cell design.

#### Power Warranty

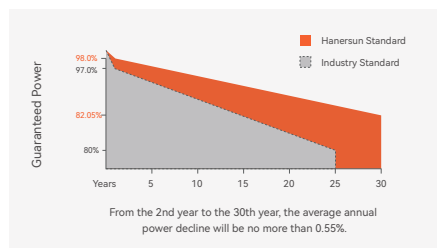

#### Comprehensive Certificates

IEC 61215-1:2016, IEC 61215-1-1:2016  
IEC 61215-2:2016, IEC 61730-1:2016  
IEC 61730-2:2016



25-year product warranty



30-year linear power output warranty

#### About Hanersun

Hanersun is a world-leading energy technology company, with a business scope from the R&D and intelligent manufacturing of solar modules, energy storage products, to comprehensive energy solutions.

**Electrical Characteristics**

Module Type	HN18-72H540W		HN18-72H545W		HN18-72H550W		HN18-72H555W		HN18-72H560W	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax)	540	408	545	412	550	416	555	420	560	424
Maximum Power Voltage (Vmp)	42.16	38.93	42.38	39.20	42.53	39.39	42.73	39.67	42.93	39.86
Maximum Power Current (Imp)	12.81	10.47	12.86	10.51	12.91	10.55	12.99	10.59	13.05	10.64
Open-circuit Voltage (Voc)	49.90	46.34	50.01	46.55	50.10	46.66	50.30	46.86	50.50	47.06
Short-circuit Current (Isc)	13.64	11.09	13.69	11.13	13.73	11.18	13.79	11.23	13.85	11.28
Module Efficiency(%)	20.90%		21.09%		21.29%		21.48%		21.68%	

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
 \*Measuring tolerance: ±3%

NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**Mechanical Parameters**

Solar Cells	Monocrystalline (182mm)
No. of Cells	144 [2 x (12 x 6) ]
Module Dimensions	2278*1134*30mm
Weight	28.5kg
Glass	3.2mm, High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA/POE
Backsheet	White
Frame	Anodized Aluminium Alloy
J-Box	IP68
Output Cable	4.0mm <sup>2</sup>
(Including Connector)	Length Portrait:1200/1200mm (can be customized)
Connector	Jiangsu Forward Electronic Technology Co.,Ltd 01C1 Stäubli Electrical connectors AG EVO2

**Temperature Ratings**

NMOT (Nominal operating cell temperature)	45°C(±2°C)
Temperature Coefficient of Pmax	-0.350%/°C
Temperature Coefficient of Voc	-0.275%/°C
Temperature Coefficient of Isc	+0.045%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)


**Packaging**

Pcs per Pallet: 36  
 Pcs per 40' HC: 720


**Operating Parameters**

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC (IEC)
Maximum Series Fuse Rating	25A
Fire Class Rating	Class C

**Dimensions (Unit: mm)**

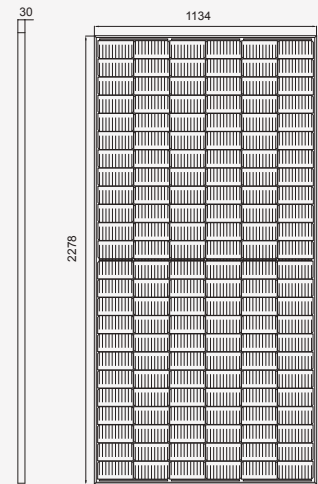


Front View

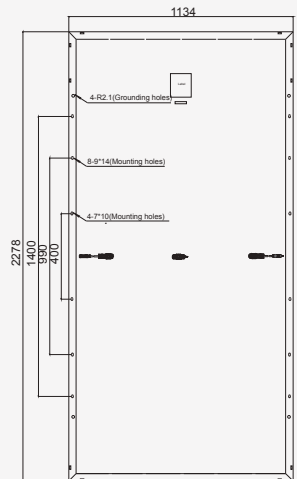

Back View

**I-V Curves of PV Module (550W)**

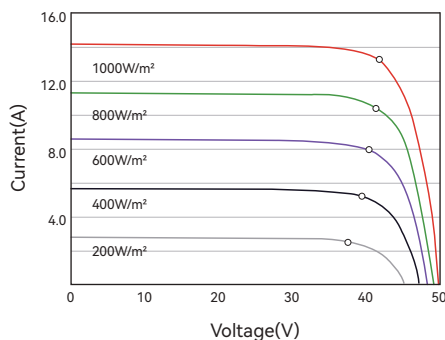

**P-V Curves of PV Module (550W)**

